





MADE IN SWEDEN

FX Airguns was founded by Fredrik Axelsson in the small picturesque town of Mariestad, Sweden in 1999. As a passionate airgun enthusiast, he was constantly on the look for the best airgun available. When Fredrik didn't find what he was looking for, he started on the journey to create the airgun of his dreams. Two decades later, he has more than succeeded.

The highly skilled FX team (with Fredrik at its helm) has since its small beginnings, relentlessly introduced cutting edge technologies that has propelled the airgun industry into a new era where FX Airguns are globally considered an industry leader. As intricate as their guns are, the philosophy

industry leader. As intricate as their guns are, the philosophy behind their creations is quite simple; to provide the most exceptional airgun in every possible way; and so, they have. FX Airguns are lovingly handcrafted by a team of over 50 Swedish craftsmen and engineers that have honed their skills to perfection; and airgun lovers worldwide have

rightfully come to expect much from them. An FX Airgun won't leave the factory until it has been thoroughly tested in all aspects of its masterfully engineered capacities. FX Airguns provide superior accuracy, dependable consistency, as well as being remarkably quiet, efficient and extremely powerful. hevitably, FX Airguns are known for outperforming their competition with ease.

Their merit list is long. FX Airguns have been a trailblazer for the airgun industry since its inception. They have more patents, unique innovations and are more technologically advanced than any other airgun manufacturer existing today.

The backbone of FX Airguns has always been and will always be their deep passion for the airgun sport and their drive to outperform yesterday. With new technology always pushing the limits of what is possible, who knows what incredible airguns are yet to be invented, in the cradle of the minds from Mariestad.





THE DREAMLINE

With the arrival of the FX Dreamline, innovation that was previously only dreamed about, is now a reality. The FX Dreamline is the first fully modular airgun system in the world. The modular design allows the rifle to change to any of the Dreamline configurations. Today's hunting bullpup can be converted for the weekend field target match. The classic sporter rifle can be switched out to house all your favorite AR furniture and accessories. Whatever you can imagine is possible with the FX Dreamline.

The beauty of the FX Dreamline starts with the revolutionary world class FX Smooth Twist X barrel (STX). This is the same barrel housing and liner system as found on other elite rifles such as the FX Impact, FX Crown and FX Wildcat. The STX barrel allows the Dreamline the unique ability of changing both the caliber of the gun as well as the inner liner of the barrel to allow for different twist rates and other bore specifications. This provides a tailored barrel to meet the vast array of projectiles available today.

The Dreamline also includes the new AMP Regulator (Adjustable Match Precision Regulator). This robust regulator is revolutionary in that it can be adjusted externally either to higher

or lower pressures without the need to remove pressure from the gun. The AMP regulator also uses the latest in high performance parts to provide precision accuracy that holds up over time.

The FX Dreamline features the same adjustability as found on other premium FX rifles. All adjustments can be fine tuned including valve flow, hammer tension, and regulator pressure. These adjustments are done quickly and easily allowing the shooter find harmonic balance and maximize the performance and accuracy of the Dreamline.

All FX Dreamline models utilize a large capacity rotary magazine. This is the same magazine used in the FX Crown and is indexed with the smooth cocking side lever. This newly designed side lever takes the ease of cocking a rifle to a whole new level as it is nearly effortless to cock.

Most Dreamline models offer a standard 220 cc cylinder filled up to 230 BAR, but there are also bottle versions of many of the configurations which will allow for more air and higher shot counts. ½" UNF threads on the barrel allow for the optional addition of a moderator. The FX Dreamline also features the world-famous FX match grade trigger, set at 15 ounces from the factory.




THE DREAMLINE CLASSIC

The FX Dreamline Classic is the natural evolution of the FX Streamline. FX has taken the proven Streamline platform and added world class features that take it to the next level; bridging the gap to rifles such as the FX Crown and FX Impact.

	Barrel		Calibre		Stock			Magazine typ	Cocking system Sidelever
Length 4,5 (.177): 500 mm Length 5,5 (.22): 500 mm Length 6,35 (.25): 600 mm Length 7,62 (.30): 600 mm	FX Smooth twist X Match grade	6,35 (.25) 7,62 (.30)	4,5 (.177)	Laminate Black Pepper	Synthetic	13 shot when Cal .30	18 shot when Cal .22	Magazine type Removable high capacity 22 shot when Cal .177	n Sidelever
Energy		Velocity	Trigger	9 0	Pressure	Muzzle	Optics	Safety	Fill pressure
4,5 (.177): 24 J • 18 ft/lbs 5,5 (.22): 41 J • 30 ft/lbs 6,35 (.25): 60 J • 45 ft/lbs 7,62 (.30) TBA	6,35 (.25): 270 m/s • 890 ft/s 7,62 (.30) TBA	4,5 (.177): 295 m/s • 940 ft/s 5,5 (.22): 280 m/s • 920 ft/s	Adjustable match trigger	One for regulator pressure	On for airtibo process	1/2" UNF	11 mm dovetail scope mount	Manual	230 Bar • 3300 Psi
	More features	Charging		Weight		9	enoth		Air capacity
twist rates) AMP Externally adjustable pressure regulator	More teatures Interchangeable Barrel Liner System (with changeable core barrel liner to obtain various	Quick charge system Mkl	Laminate: 2,9 kg	Synthetic: 2,6 kg	7,62 (.30): 1090mm	5,5 (.22): 975 mm	4.5 (177): 975 mm	6,35 (.25) 290 cc 7,62 (.30) 290 cc	4,5 (.177) 220 cc

NOTE: Energy stated in the into is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information.

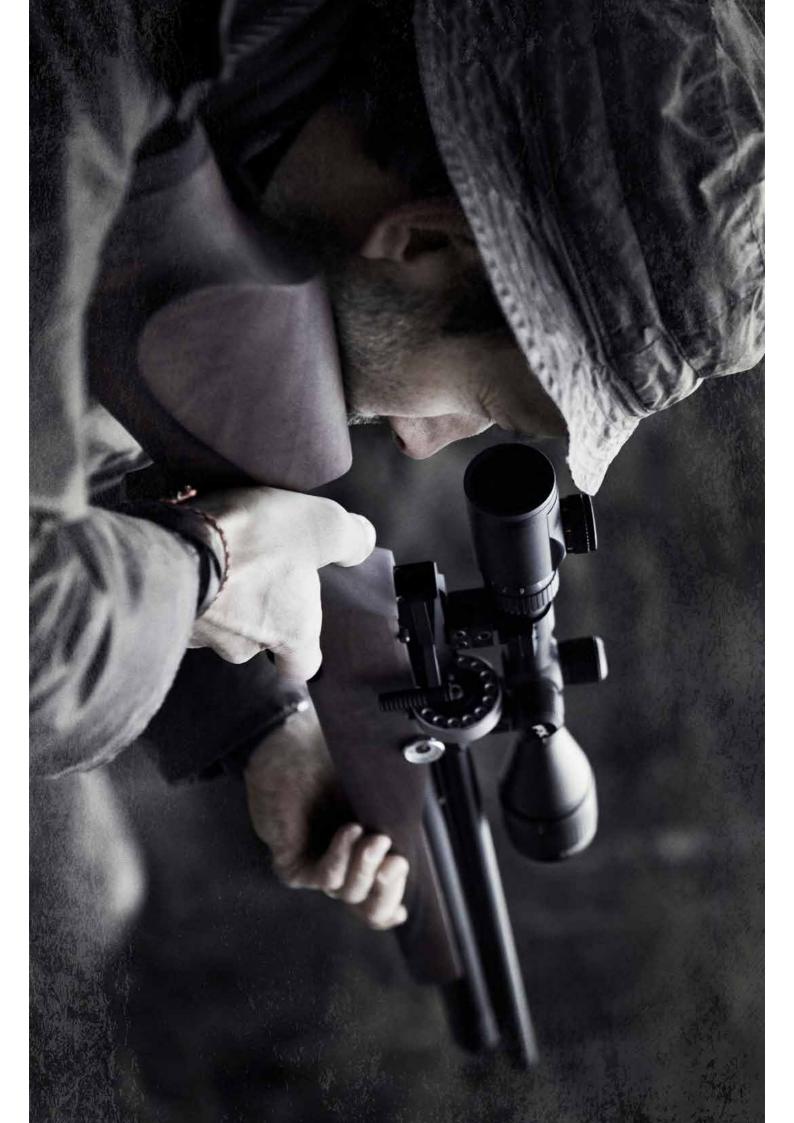



The FX Dreamline Lite is a new look model unlike other FX rifles provides an ultra-packed airgun into a very small package THE DREAMLINE LITE

up to its name of being ultra-light weight. It is also the most

customizable of all the Dreamline models. The compact version spur of the moment hunting opportunity. from the past. Weighing in at 5 1/2 pounds, this Dreamline lives without removing any of the features of the standard Dreamline. Perfect for throwing in a backpack or having ready for that







THE DREAMLINE LITE

Cocking system Sidelever	em Sidelever	Fill pressure	Fill pressure 230 Bar • 3300 Psi	Air capacity	4,5 (.177) 220 cc
Magazine typ	Magazine type Removable high capacity	Safety	Manual		6,35 (.25) 220 cc 6,35 (.25) 290 cc
	18 shot when Cal .177	Ontics	11 mm dovetail		7,62 (.30) 290 cc
	16 shot when Cal .25	Opines	scope mount	Length	4,5 (.177): 960 mm
	13 shot when Cal .30	Militalo	16"		6.35 (.22): 960 mm
Stock	Synthetic, Quick release	Muzzie	S CNT		7,62 (.30): 1060mm
	(hogue pistol grip included)	gauge	One for airtube pressure	Weight	2,6 kg
Calibre	4,5 (.177)		One for regulator pressure	Charging	Quick charge system
	6.35 (.25)	Irigger	Adjustable match trigger	Mary fosture	*Interchangeship Borro
	7,62 (.30)	Velocity	4,5 (.177): 295 m/s • 940 ft/s		Liner System
Barrel	FX Smooth twist X Match grade		6,35 (.25): 270 m/s • 890 ft/s 7,62 (.30) TBA		barrel liner to obtain various twist rates)
	length 4,5 (.177): 500 mm	Energy	4,5 (.177): 24 J • 18 ft/lbs		AMP Externally adjustable pressure regulator
	length 5,5 (.22): 500 mm		6.35 (35): 65 • 47 #/lbs		
	length 7,62 (.30): 600 mm		7.62 (.30) TBA		

NOTE: Energy stated in the into is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information.



NOTE: Energy stated in the info is maximum night be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for r

Weight

Charging

Quick charge system Synthetic: 2,4 kg Length

4,5 (.177): 720 mm 5,5 (.22): 720 mm 6,35 (.25): 835 mm 7,62 (.30): 835 mm

Air capacity

4,5 (.177) 220 cc 5,5 (.22) 220 cc 6,35 (.25) 290 cc 7,62 (.30) 290 cc

AMP Externally adjustable pressure regulator








THE DREAMLINE TACTICAL

The Dreamline Tacical brings AR options like the mil
an ultra-packed airgun into a very small package with

spec receiver tube, full picatinny scope rail, and more to the airgunner who would like to add common AR parts and options to their airgun.The compact version provides

an ultra-packed airgun into a very small package without removing any of the features of the standard Dreamline. Perfect for throwing in a backpack or having ready for that spur of the moment hunting opportunity.



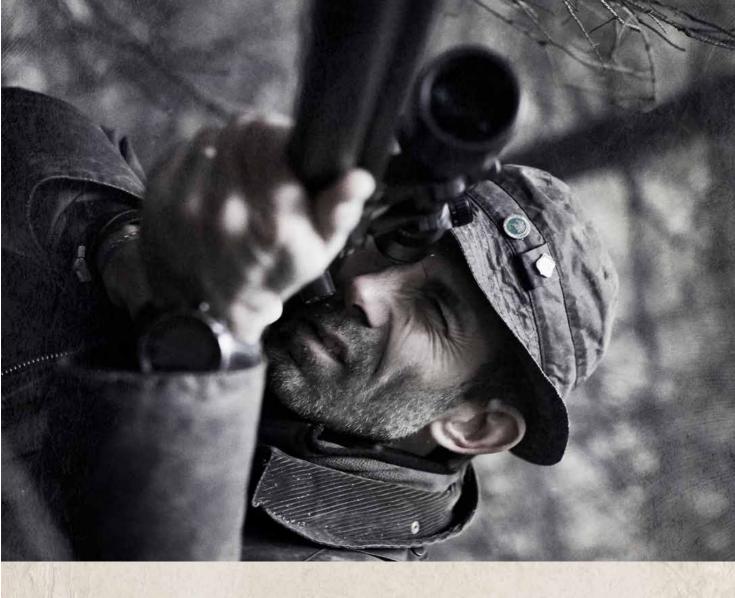




THE DREAMLINE TACTICAL

	Barrel		Calloid	Callibro	Stock			Magazine type	Cocking system Sidelever
Length 4,5 (.177): 500 mm Length 5,5 (.22): 500 mm Length 6,35 (.25): 600 mm	FX Smooth twist X Match grade	6,35 (.25) 7,62 (.30)	55(22)	4.5 (177)	AR15 Ready (not included) Grip AR15 (hogue pistol	13 shot when Cal .30	18 shot when Cal .22	Magazine type Removable high capacity 22 shot when Cal .177	n Sidelever
Energy	w ·	Velocity	III gge	Trionor	Pressure gauge	Muzzle	Optics	Safety	Fill pressure
4,5 (.177): 24 J • 18 ft/lbs 5,5 (.22): 41 J • 30 ft/lbs	7,62 (.30) TBA	4,5 (.177): 295 m/s • 940 ft/s 5,5 (.22): 280 m/s • 920 ft/s	Adjustable illator trigger	Adjustable mostab tricocor	One for airtube pressure	1/2" UNF	Picatinny	Manual	230 Bar • 3300 Psi
		i cardina	More features	Charging	Weight	rong an	enoth		Air capacity
AMP Externally adjustable pressure regulator	twist rates)	Barrel Liner System (with changeable core	Interchangeable	Quick charge system	Approximately 2,1 kg without stock	without stock	Approximately 700 - 800mm	6,35 (.25) 290 cc 7,62 (.30) 290 cc	4,5 (.177) 220 cc

NOTE: Energy stated in the into is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information

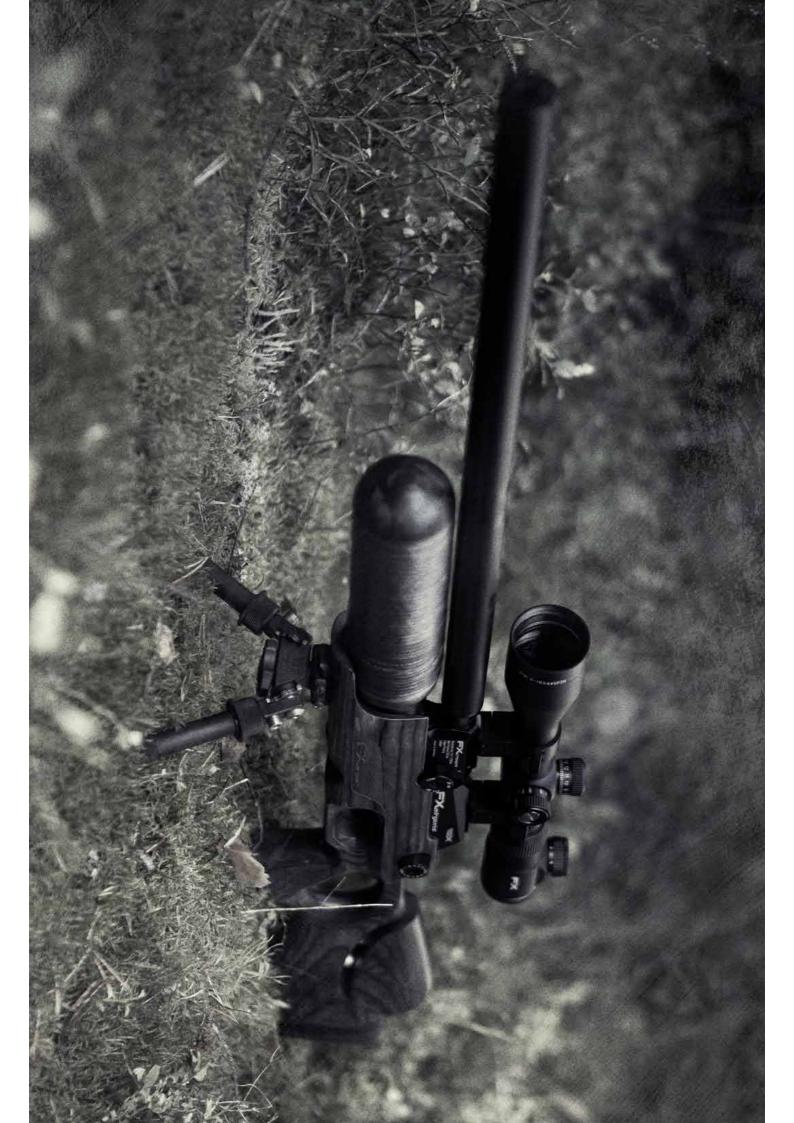



THE CROWN

in a state of shock, the FX Crown is the most progressively airgun world speechless and gun manufacturers everywhere With a ground-breaking new barrel system that has left the date, the brand-new FX Crown is quite simply Airgun Royalty. engineered and accurate air rifle ever created. Period.


allows for changing of barrel twist rates, and other bore speci-Barrel is a fully rifled barrel using the proprietary system of of adjustments and fine-tuning options, but also for ushering fications which allow for a wider array of projectile use. in the advancement of the FX Smooth Twist X Barrel and FX Crown is extraordinary; not just for incorporating a plethora designed hunting rifle. Enter, the Crown. The newly announced many would desire these same features in a more traditionally steel tubing, all housed as an interchangeable barrel liner that imparting the inner rifling of the barrel from the outside of the Interchangeable Barrel Liner System. The Smooth Twist X features of the earlier FX Impact, the FX engineers knew that

With the Crown, the same adjustability features previously

found on the FX Impact are retained. You can fine tune the countless degrees of fine tuning to suit your individual needs flow. With these cutting-edge features, the Crown provides hammer tension via an accessible power wheel adjuster, and to maximize your air rifle to its optimal performance. externally adjust the air regulator as well as adjusting the air

and so perfectly engineered that it allows for the shooter to change of any of its four available calibers (.177, .22, .25 or from their scope. This all-in-one rifle also allows for the quick cycle and cock the gun without ever needing to pull their eye side cocking lever. The lever itself is so accurately placed moderator, large capacity magazine, and an extremely smooth 480 cc light weight carbon fiber air bottle, telescoping .30) by acquiring additionally available barrel kits. Other features include an adjustable match grade trigger

KING of all air rifles of airguns and will easily maintain the Royal Gold Standard of Benchrest" competition), the FX Crown is the next generation (it was the winning rifle used in the annual 2017 "Extreme Having already claimed its first competition victory

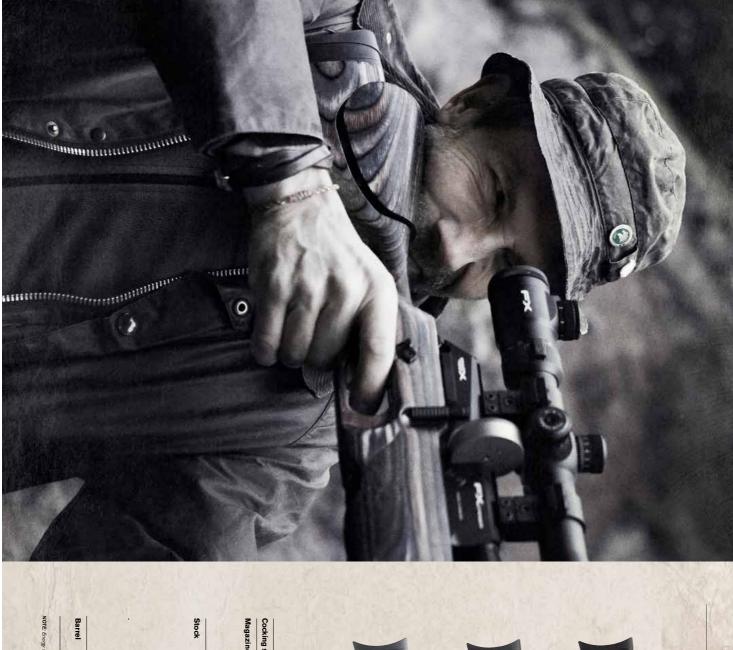



THE CROWN

Match grade	EX Smooth twist Y	Adjustable recoil-pad Thumbhole	Ambidextrous Adjustable recoil-pad Thumbhole Synthetic	Thumbhole Adjustable cheek-piece Walnut	Ambidextrous	Coloured I aminate	16 shot when Cal .25	22 shot when Cal .177	Demovable high capacity	a system Sidelever	
Air capacity	Safety	Fill pressure	Energy	Trigger		Pressure gauge	, N	T T T T T T T T T T T T T T T T T T T	Mirzylo	Optics	
480 cc	Switch style	Max 250 bar (3600 psi)	4,5 (.177): 24 J • 18 ft/lbs 5,5 (.22): 41 J • 30 ft/lbs 6,35 (.25): 65 J • 47 ft/lbs 7,62 (.30): 102 J • 75 ftlbs	Adjustable Match Trigger (variations may occur).	One for regulator pressure	Pressure gauge Dual Manometers.	on country).	(variations may	Built-la Obroid	11 mm dovetail scope mount	
				Rifle Features	Charging		Weight	Length		Air cylinder	
Caliber System	pressure regulator	tension and airflow) AMP Externally adjustable	barrel liner to obtain various twist rates) Dual External Power Adjusters (hammer spring	Interchangeable Barrel Liner System (with changeable core	Foster Quick Disconnec	Synthetic 2,6 kg	Laminat 2,9 kg	970 - 1030 mm	fiber wrapped	Removable, Carbon	

NOTE: Energy stated in the into is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information



as adjusting the air flow. With these cutting-edge features, power wheel adjuster, externally adjust the air regulator as well 480 cc light weight carbon fiber air bottle and an extremely You can fine tune the hammer tension via an accessible

the Crown provides countless degrees of fine tuning to suit your individual needs and to maximize your air rifle to its optimal performance.

smooth side cocking lever. The KING of all air rifles just got better Other features include an adjustable match grade trigger,

Fill pressure Max	Barrel Arrov	Calibre Com	Amb Adju Thun	Adju	Adjusta Walnut	Stock Colo Amb Adju	Magazine type Com	Cocking system Sidelever	
Max 250 bar (3600 psi)	Arrow version	Compatible with Crown barrels	Syntnetic Ambidextrous Adjustable recoil-pad Thumbhole	Adjustable recoil-pad Thumbhole	Adjustable cheek-piece Walnut Ambidestrous	Coloured Laminate Ambidextrous Adjustable recoil-pad	Compatible with Crown magazines.	lever	
		Energy		Velocity	Trigger	Pressure gauge Dua One One	Optics	Safety	
lowe	FAC	Arro	FAC can lowe	Arro	Adju Mat	auge Dua One One	11 r scol	Swi	

FAC Power output, but can be turned higher/ lower if needed.	Arrow: 80 J • 59 ft/lbs Note: above figures is	can be turned higher/ lower if needed.	factory recommended FAC Power output, but	Arrow: 90 m/s • 295 ft/s Note: above figures is		Adjustable Match Trigger	One for regulator pressure	uge Dual Manometers	11 mm dovetail scope mount	Switch style	
				More features	Charging		Weight	Length	Air cylinder	Air capacity	
	Interchangeable Caliber System	AMP Externally adjustable pressure regulator	Adjusters (hammer spring tension and airflow)	Dual External Power	Foster Quick Disconnect	Synthetic 2,6 kg	Laminat 2,9 kg	980 mm	Removable Carbon fiber wrapped	480 cc	





THE IMPACT MKII

Every so often there are leaps forward in technology that forever change our perception of what is possible. The FX Impact is such a phenomenon and has permanently pushed forward the boundaries of what to expect from an air rifle.


This all-in-one air rifle has been engineered to satisfy the most demanding airgun shooter with high-performance features. The Impact is completely adjustable: air valve control, hammer spring tension, and even regular adjustments can be made externally to allow for various shooting scenarios.

The Impact MkII Silver

The Impact now incorporates the new FX Smooth Twist X Barrel which is a fully rifled barrel liner. FX's proprietary process of imparting the inner rifling of the barrel from the outside of the steel tubing, is an outstanding upgrade in airgun accuracy. This Smooth Twist X Barrel is housed in the Interchangeable Barrel Liner System allowing the shooter

to swap and change barrel liners of various twist rates, bore specifications and more; all to tailor the barrel to different projectile sizes. The breech and barrel assembly also incorporate a quick-change system that allows for any of the four calibers (.177, .22, .25 or .30) to be used. All that is required is an extra barrel and pellet probe for each caliber.

Other notable features of this bullpup include a unique match grade trigger system that does not rely on connection rods or linkages. The smooth side cocking lever is placed perfectly above the trigger to allow for the quickest possible follow-up shot. This high powered and tactical, yet lightweight and compact airgun is a sensational piece of cutting-edge technology. With all these features wrapped into one rifle, the FX Impact will continue to be the benchmark for air rifles worldwide.

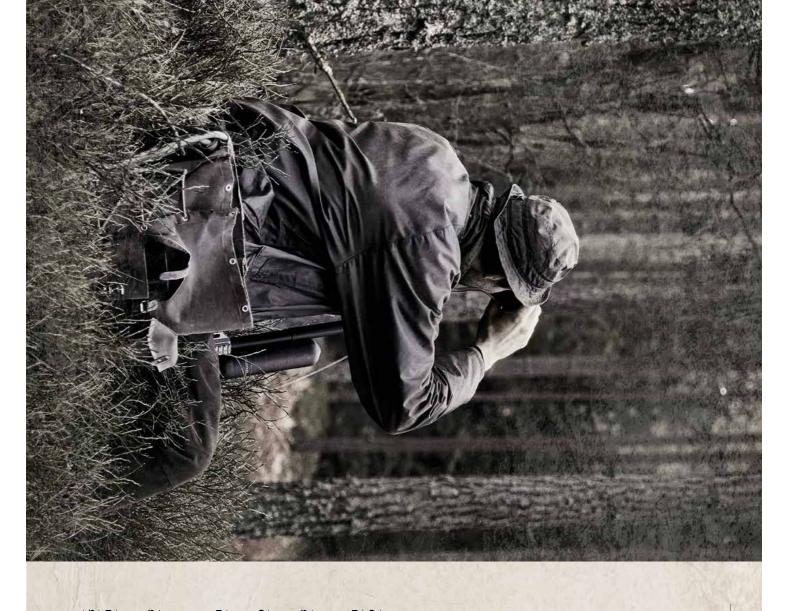




Comes delivered in a compact hard case with room for two barrels, pellet probes, spare magazines and ammunition.

And there is also plenty of room for optics.


THE IMPACT MKII

Cocking system	Cocking system Forward positioned sidelever	Optics	Picatinny rail	Length	745 mm
Magazine type	Removable high capacity	Muzzle	Built-In Shroud system	Weight	3,2 kg
	28 shot when Cal .177		moderator. (variations	Charging	Foster Quick Disconnect
	28 shot when Cal .25 23 shot when Cal .30		may occur depending on country).	More features	Interchangeable Barrel Liner
Stock	AR15 style grip Hogue rubber grip delivered	Pressure gauge	Pressure gauge One for airtube pressure One for regulator pressure		core barrel liner to obtain various twist rates)
	Adjustable recoilpad (height)	Velocity	4,5 (.177): 300 m/s • 1000 ft/s 5.5 (.22): 280 m/s • 920 ft/s		AMP Externally adjustable pressure regulator
Caliber	4,5 (.177) 5,5 (.22)		6,35 (.25): 270 m/s • 900 ft/s 7,62 (.30): 265 m/s • 870 ft/s		Power adjuster (hammer spring tension)
	6,35 (.25) 769 (30)		Note: above figures is		Valve adjuster (valveflow
			FAC Power output, but		Interchangable Caliber System
9	Match grade		if needed.		Multiple Accessory rails (pica tinny) sides and bottom
	Length 500 mm 4.5 (.177)	Energy	4,5 (.177): 24 J • 18 ft/lbs		Match Trigger
	Length 600 mm 6.35 (.25) Length 600 mm 7.62 (.30)		6,35 (.25): 41 J • 30 livibs 6,35 (.25): 65 J • 47 ft/lbs 7,62 (.30): 102 J • 75 ft/lbs	Accessories	Ergo tactical grip, deluxe.
Shot canacity	45 (177) 180 shots approx		Note: above figures is		barrel with shroud)
Silot capacity	5,5 (.22): 130 shots approx		FAC Power output, but		700 mm Barrel Kit (pellet
	6,35 (.25): 100 shots approx 7,62 (.30): 40 shots approx		can be turned higher/lower if needed.		fixed shroud)
Fill pressure	Max 250 bar (3600 psi)	Air capacity	480 cc		
Safety	Switch style	Air cylinder	Carbon fiber tank		

NOTE: Energy stated in the info is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information.

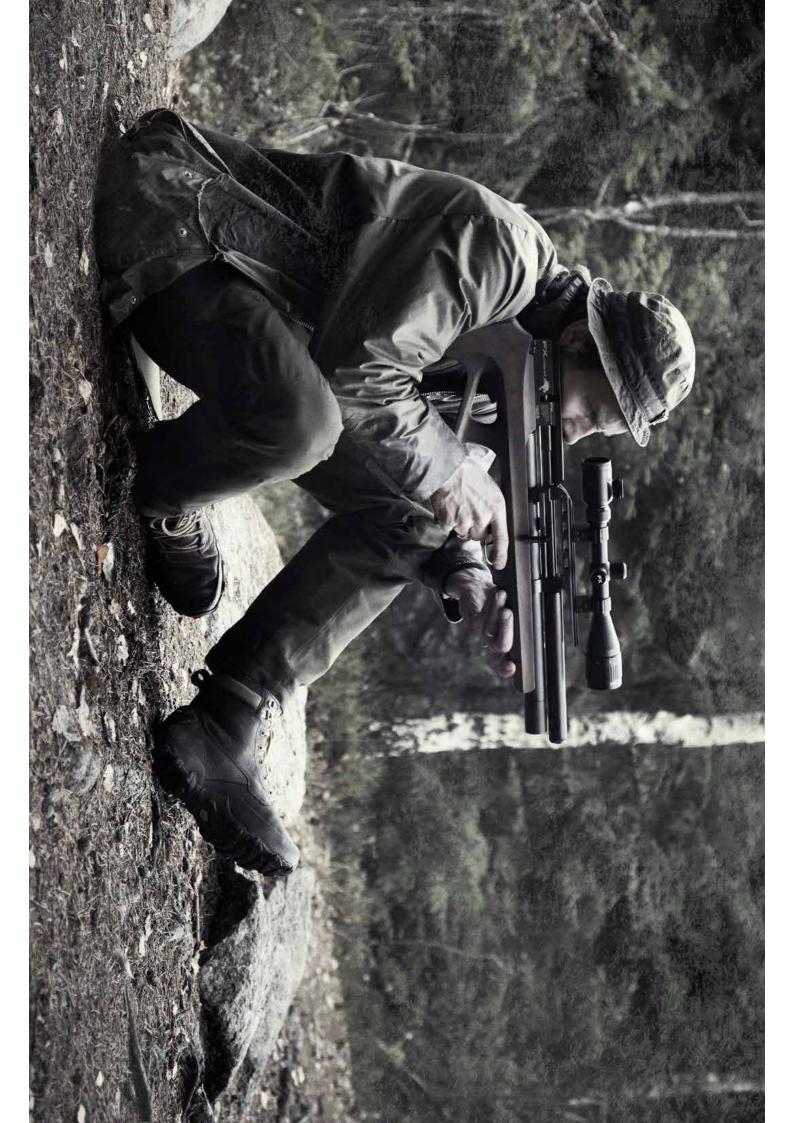

FX AIRGUNS





THE WILDCAT MKII

selling airgun the world over. Now in 2018 FX's engineers have that would be exceptional on any rifle, let alone a bullpup. The The FX Wildcat may be the perfect compact airgun. Beautifully much lighter in hand. Other upgrades include an upgraded brought us the Wildcat MKII. original Wildcat upon its debut in 2015, quickly became a top balanced, light weight, smooth cocking, and featuring a trigger

FX Smooth Twist X Barrel. The X Barrel liner is a fully rifled specifications that tailor to the vast array of airgun projectile weights and shapes. smooth twist barrel, available in varying twist rates and bore liner that comes standard with the MKII, to an upgraded barrel liners, and if desired upgrade the FX Smooth Twist barrel This is the system that allows users the ability to exchange adding the all new FX Interchangeable Barrel Liner System The MKII builds upon the groundbreaking Wildcat,

This new barrel system lends to a Wildcat that is now

better consistency and shot count. reloading mechanism, trigger, and updated airflow that obtains

used. Forward placement of the lever provides quick and soft ting sidelever possible with only the highest quality materials cocking lever has been perfected to be the smoothest opera-Features include the highly accurate internal air regulator, away from the trigger. cocking of the gun with only the slightest of hand movement high-grade aluminum parts, and a fully shrouded barrel. The easy load magazine system, finger print resistant finish on all The rest of the original Wildcat stays perfectly undisturbed.

FX Airguns as the finest airgun manufacturer in the world. all the performance and accuracy that has established status as the perfectly designed and executed bullpup featuring The Wildcat MKII enhancements continues to solidify its






THE WILDCAT MKII

Safety	Fill pressure		Daire	0		Stock	Magazine type	Cocking system Sidelever
Manual	230 Bar • 3300 Psi	HOLE (1997) Eorigin 1999 IIIII	Match grade 4,5 (.177) Length 500 mm 5,5 (.22) Length 500 mm 6,35 (.25) Length 700 mm 762 (.30) Length 700 mm	EV Smooth Tuist V	Laminate Black Pepper	Synthetic	Magazine type 8 shot in cal 4,5 (,177) 8 shot in cal 5,5 (,22) 8 shot in cal 6,35 (,25) 7 Shot in cal 7,62 (,30)	n Sidelever
	All capacity	Aircanacity	Energy		Trigger	Pressure gauge Yes	Muzzie	Optics
7,62 (.30) 350cc	5,5 (.22) 230 cc 6 35 (.25) 350 cc	4 E (177) 990 co	4.5 (.177): 24 J • 18 ft/lbs 5,5 (.22): 41 J • 30 ft/lbs 6,35 (.25): 65 J • 47 ft/lbs 7,62 (.30): 95 J • 70 ft/lbs	(200 - 000 Grain)	Adjustable match trigger	uge Yes	Built-In Shroud system with additional moderator. (variations may occur depending on country).	11 mm dovetail scope mount
					More features	Charging	Length	Air cylinder
			with changeable conbarnel liner to obtain various twist rates) AMP Externally adjust pressure regulator	Cities System		Quick charge system	4,5 (.177): 680 mm 5,5 (.22): 680 mm 6.35 (.25): 900 mm 7,62 (.30): 900 mm	Not removable

OTE: Energy stated in the info is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more informat

4

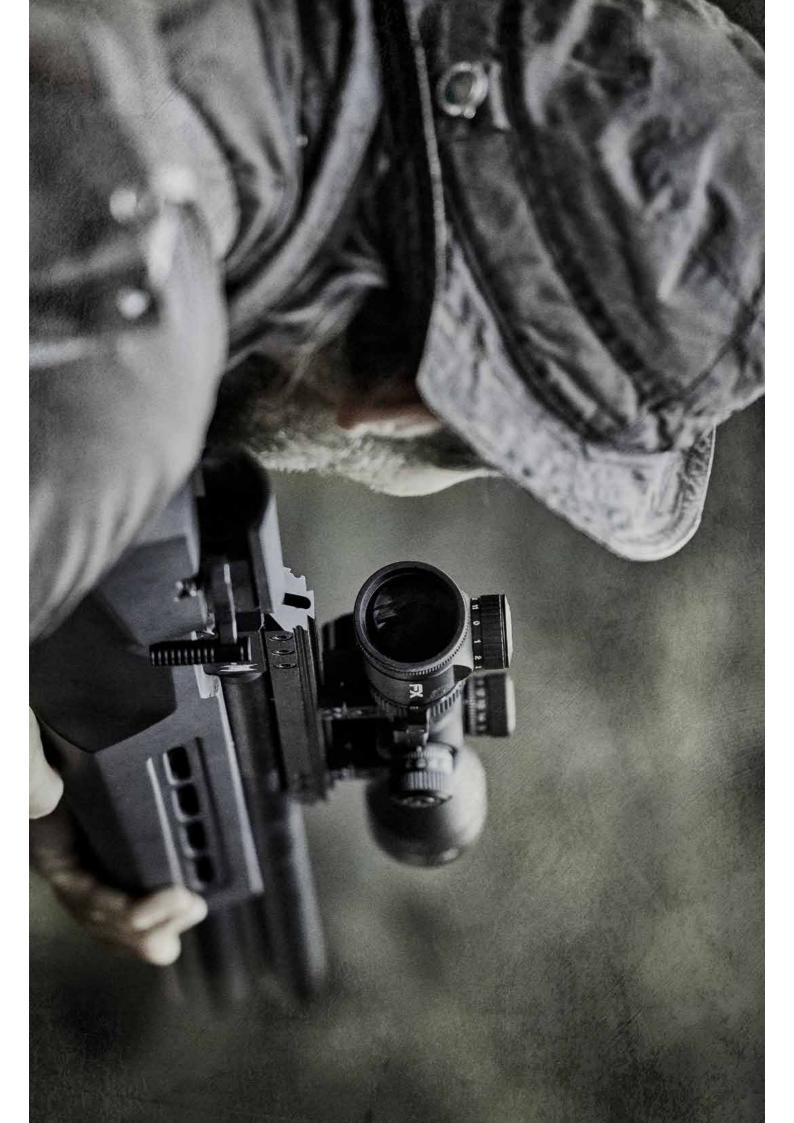



THE BOBCAT MKII

designs. Short and quick to handle as a bullpup and easy to exciting solutions and so the Bobcat was born. eager to push the envelope and create more functional and Bobcat air rifle. The design team looked at the current mar-In 2012, FX developed and brought into production the and uncomfortable to use. In typical FX tradition, they were kets bullpup offerings and found most cocking systems hard The Bobcat is a hybrid that sports the best of two action

use with high power and accuracy as a full-length rifle.

that reads regulator and air supply pressures. Bobcat MKII. This new version comes standard with a competition grade regulator, and a dual pressure gauge system FX to improve on this fine shooting platform. Enter the The overwhelming success of the Bobcat has inspired

> a cocking lever in billet aluminum. Internal improvements have that protects the inlet valve from debris. Also new on the MKII is The probe filling port has an integrated twist-open dust cover also been made to increase the reliability of the rifle.

demanding airgun shooter. for high precision air rifles and will not disappoint the most a synthetic soft touch stock for maximum comfort in all power adjusting system which provides very consistent weather conditions. The Bobcat MKII will set the standard match winning accuracy with quiet operation nestled in in the industry. The Bobcat MKII provides high power, to a single piece breech block that houses a valve and velocity and one of the highest shot count per air volume The famous match winning Smooth Twist Barrel is fitted

ocking
system
Sidelever

Fill pressure	Barrel	Caliber	Stock	Magazine type
220 bar • 3200 psi	FX Smooth Twist Match grade	4,5 (.177) Length 500 mm 5,5 (.22) Length 500 mm 6,35 (.25) Length 600 mm 7,62 (.30) Length 600 mm	Synthetic Thumbhole Adjustable recoil-pad	Removable magazine 16 shot in cal 4,5 (.177) 12 shot in cal 5,5 (.22) 11 shot in cal 6,35 (.25) 9 shot in cal 7,62 (.30)

Safety Energy Optics Trigger Velocity Pressure gauge Dual. One for the air tank One for the regulator Muzzle 4,5 (.177): 300 m/s• 1000 ft/s 5,5 (.22): 280 m/s• 920 ft/s 6,35 (.25): 265 m/s• 870 ft/s (280 m/s• 920 ft/s regulated) 7,62 (.30): 265 m/s• 870 ft/s 4,5 (.177): 24 J • 18 ft/lbs 5,5 (.22): 41 J • 30 ft/lbs 6,35 (.25): 65 J • 48 ft/lbs 7,62 (.30): 105 J • 76 ft/lbs Manual Adjustable match trigger (300 - 700 gram) Full Shroud 11 mm dovetail scope moun

		, T 0, 0			
ALCOHOL: NO.	Charging	Weight	Length	Air cylinder	Air capacity
and the second	Included fill probe	4.5 (.177): 3.5 kg 5,5 (.22): 3,5 kg 6,35 (.25): 3,8 kg 7,62 (.30): 3,8 kg	4,5 (,177): 750 mm 5,5 (,22): 750 mm 6,35 (,25): 940 mm 7,62 (,30): 940 mm	Removable	4,5 (.177) 300 cc 5,5 (.22) 300 cc 6,35 (.25) 470 cc 7,62 (.30) 470 cc

NOTE: Energy stated in the info is maximu energy. Due to differences

(250 bar • 3600 psi Cal: 7.62)





THE BOSS

"Revolutionary" is the only word that describes the FX Boss and the development of this rifle. With a custom made .30 caliber Smooth Twist barrel, the Boss has quickly proven itself in competition and in the field. The FX Boss has been designed for heavy dury, long range field work with a power output of 75 plus ft/lbs and 48 shots per fill from the regulated action. The Boss comes with a magazine that holds nine .30 caliber pellets and can also be used as a single shot. With tested accuracy of ½ inch at

Cocking system Sidelever

75 yards, the Boss is deadly on coyote or small deer. The walnut thumbhole stock sports very nice grain and the synthetic option has a nice all weather soft touch coating.

The FX Boss is light in weight, easy to handle, and quiet in report. The two-stage adjustable match-grade trigger gives precise control over the shot for the most in accuracy. With the power and performance provided, the FX Boss lives up to its name.

Cambrid	Calibre				9	Stock	Magazine type 9 shot magazine
100	769 (30)	Thumbhole Adiustable recoil-pad	Adjustable recoil-pad	Walnut Thumbhole	Thumbhole Adiustable recoil-pad	Syntatic	9 shot magazine
Shot capacity	Air cylinder	Air capacity	Energy	Velocity	Trigger	- Pressure gauge Yes	
Shot capacity Approx. 48 at full	Not removable	500 cc	101 J - 75 ft/lbs	265 - 270 m/s • 8	Fully Adjustable ma	e Yes	

	pad	9				II-pad						
Chat annaith	Air cylinder	Air capacity	Ellergy		velocity	Volonity	III Section	Tricana	Plessure gauge les	Droce carries		Barrel
Chat and the state of the state	Not removable	500 cc	1013 = 73 10108	101 75 4/lbs	200 - 270 11/8 - 670 11/8	065 070 m/c 870 #/c	rully Adjustable match myger	Eully Adjustable motor trices	a de	You	Length 600 mm	FX Smooth Twist - Match grade Fill pressure
Charging		and Grant	Weight	Foligai	I anoth	Muzzie	The second second	optics		Sarety	2	Fill pressure
Foster Quick Disconnect	Laminate C,+ Ng	Walnut 3,4 kg	Synthetic 3.9 kg	1183 11111	1105 mm	Shrouded		II mm dovetall scope mount		Manual		Max 250 bar (3626 psi)

Erengy stated in the in is in awimm possible energy. Due to differences in aguitations the fille might be set to a lower energy, from 7.5 Joule and up. Contact your local dealer for more information.



THE ROYALE 400

and a 3-step patented power adjuster, allows for super-fast table match-grade trigger for crisp, precise release of the shot into the breech block is a super smooth and effortless side lever, cocking system and spring tensioned magazine. Adjusvalve system before it was put into production. Incorporated years in developing and testing the Royale breech block and This gun is without a doubt, an FX Flagship! FX spent two

comes standard which will give more consistent shots per fill. Completely recoil free. in report with the included suppression system. A regulator also selection of the required power level. The power adjuster supply provides many super accurate shots from the Smooth will also repeat itself with absolute precision. The 400 cc air Twist barrel. The Royale 400 is a lightweight super gun, quiet

									type	stem	
Length 500 mm	FX Smooth Twist	5,5 (.22) • 4,5 (.177)	Adjustable recoil-pad	Thumbholo	Adjustable recoil-pad	Walnut Thumbhole	Thumbhole Adjustable recoil-pad	Synthetic	16 shot in cal 4,5 (.177)	Sidelever	
Fill pressure	Shot capacity	Air cylinder	Air capacity	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Energy		Velocity	Trigger	Pressure gauge	
Max 220 bar (3200 psi)	Approx. 60 at full power	Removable	400 cc	• 18 π/IDS	4,5 (.177) 24 Joule	5,5 (.22) 48 Joule • 36 ft/lbs	300 m/s • 1000 ft/s	4.5 (177) and 5.5 (22)	Adjustable match trigger (400 - 700 a)	Air tank gauge	
			Ciarging	Charning		Weight	Length	Muzzle	Optics	Safety	
			TOSIG	Forto	Lamir	Synth	1030	Shrou	11 m	Manu	

Stock Magazine t Cocking sys

nk gauge	Safety	Manual
stable match trigger	Optics	11 mm dovetail for scope
- /O g)	Muzzle	Shrouded
177) and 5,5 (.22) n/s • 1000 ft/s	Length	1030 mm
22) 48 Joule t/lbs 177) 24 Joule	Weight	Synthetic 3,2 kg Walnut 3,4 kg Laminate 3,4 kg
36 18	Charging	Foster Quick Disconnect
ovable		
ox. 60 at full power		
(0)		

Stock

Magazine type Cocking system

NOTE: Energy stated in the info is maxim. in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information

48

Barrel Caliber




THE ROYALE 500

power settings as well as internally regulated. Available in standard with the patented power adjuster with repeatable air cylinder to provide maximum performance. The 500 comes smooth twist match grade barrel as well as a larger 500 cc with a few exceptions. The 500 is a .25 caliber with a longer The Royale 500 sports all the features of the 400-series rifle

long-range shooting. the Royale 500 is the best choice for larger pest and extended periods of time. Very high powered and recoil free, lighter than it appears and can be carried in the field for stock or a black pepper laminate stock. The 500 is much synthetic with soft-touch surface, a luxurious walnut

n Sidelever	Pressure gaug	Pressure gauge Air tank gauge	Optics	11 mm dovetail scop mount
11 shot magazine	Trigger	Adjustable match trigger (400 - 700 g)	Muzzle	Shrouded
Syntetic		065 070 m/s - 870 000 4/-	Length	1195 mm
Adjustable receil and	Velocity	265-270 m/s • 870-900 m/s	Woight	0
Walnut Thumbholo	Energy	60 Joule • 45 ft/lbs	weight	Walnut 3,4 kg
Adiustable recoil-pad	Air canacity	500 66		Laminate 3,4 kg
Laminate Black Pepper	An embarcis		Charging	Foster Quick Disconnect
Thumbhole	Air cylinder	Not removable		
Adjustable recoil-pad	Shot capacity	Shot capacity Approx. 60 at full power		
6,35 (.25)		Mar oon be (one)		
EY Smooth Twist - Match grade	FIII pressure	Max 220 bar (3200 psi)		
Length 600 mm	Safety	Manual		

NOTE: Energy stated in the info is maximum possible energy. Due to differences in regulations the rifle might be set to a low er energy, from 7,5 Joule and up. Contact your local dealer for more Barrel Caliber

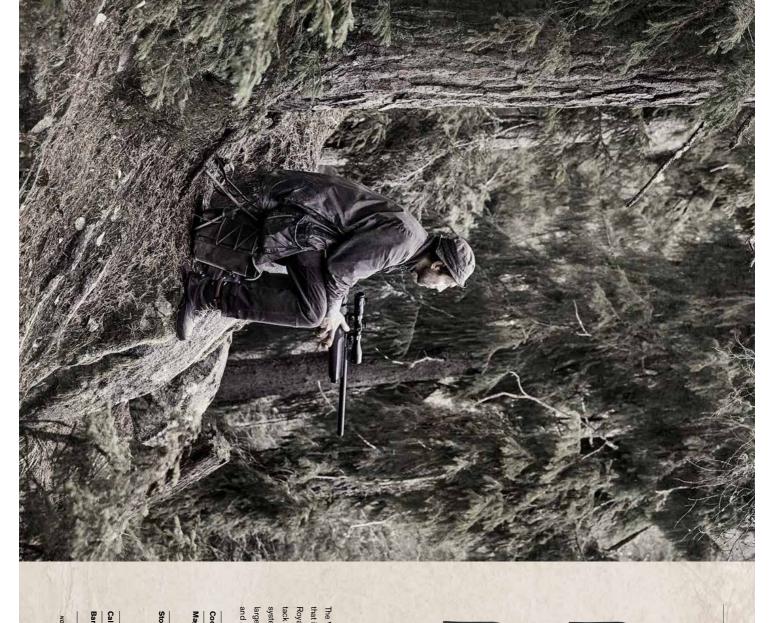



THE VERMINATOR MK II

system, the Verminator MKII does not disappoint. It boasts a Royale breech block is the foundation for this high-performance that is packed with high quality features. The award-winning and an adjustable trigger. The synthetic stock is both large shot-count, three-step power adjuster, match grade barrel tack driver. With a 400-cc air cylinder and super-efficient valve The Verminator MKII is the premier, small, takedown style rifle

purpose-built and adjustable for length of pull and face position. Comes in dark-grey metallic with soft-touch surface. The multi-shot for super quiet report and choked for match accuracy. The rifle magazine combined with a super smooth side lever cocking comes in a fitted case with room for additional accessories. action and gives fast follow up shots. The barrel is fully shrouded Recoil free. Also available as full-size edition with long barrel.


	Barrol	Caliber	Callibra				Stock		Magazine type	Cocking system Sidelever
Length 300 mm	EV Smooth Twint	0,0 (.22) • 4,0 (.177)	E E (00) - 4 E (177)	piece (lengin/angle)	Adjustable bottle cover cheek	Adjustable recoil-pad	Synthetic	I I SHOUR Cal 6,35 (.25)	Magazine type 16 shot in cal 4,5 (.177) 12 shot in cal 5,5 (.22)	m Sidelever
Optics	Salety	Cafatu	riii pressure		Air cylinder	Air capacity	a crowny	Velocity	Trigger	Pressure gaug
11 mm dovetail scope mount	Mailua	Montage	Max 220 bar (3200 psi)	000	Removable	400 cc	rejustable in an co stops	Adjustable in three steps	Adjustable match trigger (400 - 700 g)	Pressure gauge Air tank gauge
					- Contract	Ev+rac	Charging	Meidur	Length	Muzzle

2,9 kg

750 - 800 mm Threaded M20

Pressure regulator Foster Quick Disconnect

NOTE: Energy stated

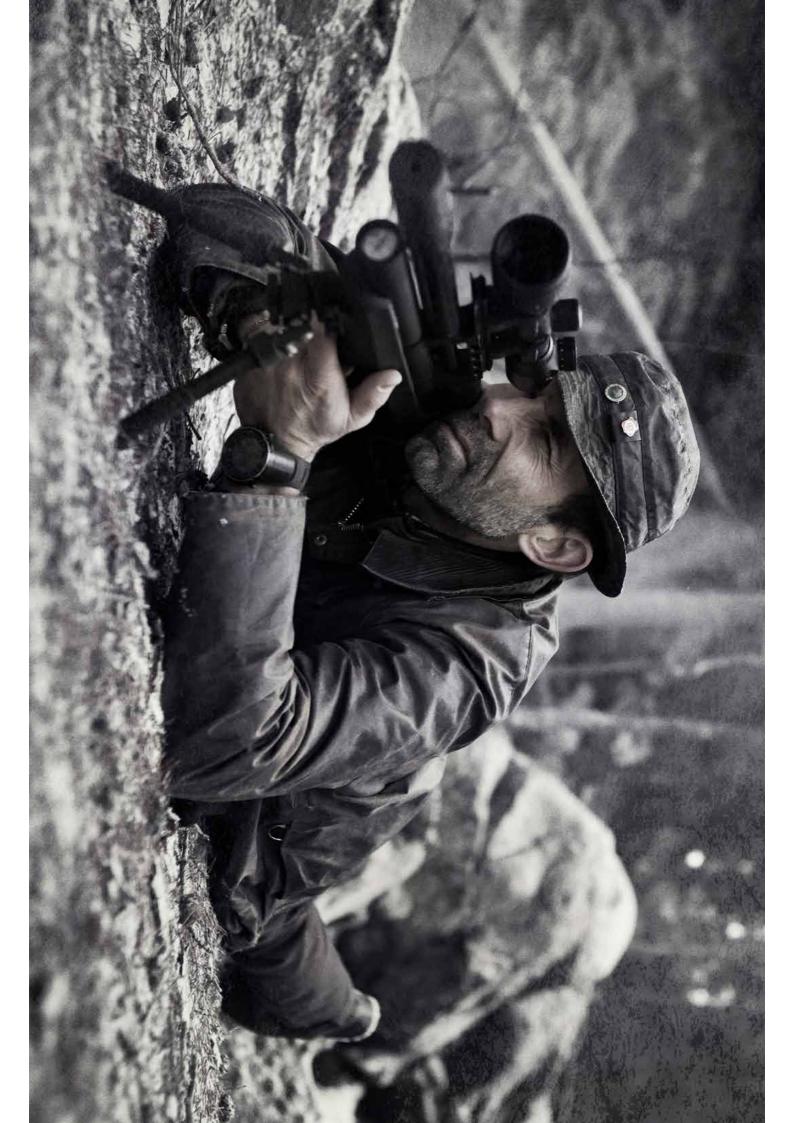



THE VERMINATOR EXTREME

case, you will find the Verminator MKII rifle and FX scope versatility. We have taken into consideration all possible airgun reveal a full length barrel for high power applications as well mounted with quick change mounts. Further investigation will scenario with the Verminator. Upon opening the included hard applications and have included the necessary kit to handle any

The FX Verminator Extreme is the ultimate in compact airgun as a shroud extension for super quiet report. We have also included a special barrel that will shoot arrows for added fun and easy and requires no tools. Included in the case are four for small to medium size game. Switching barrels is quick soft-touch surface. Available in synthetic stock in dark-grey metallic with target arrows and crossbow-optic with quick change mounts

	Pressure gauge Air tank gauge	Air tank gauge	Fill pressure	Max 220 bar (3200 psi)
77)	Trigger	Adjustable match trigger	Safety	Manual
25)	Volosity	Adjustable Law/High	Optics	11 mm dovetail scope mount
9	velocity	Pellet 4,5 (.177) – 1000 fps	Muzzle	Threaded M20
		Pellet 6,35 (.25) – 900 fps Pellet 7,62 (.30 – 870 fps	Length	970 -1140 mm 135 - 1305 mm with extension
	Air capacity	500 cc	Weight	3,6 kg without optics
	Air cylinder	Removable		Total Scient Will hard case
ided	Shot capacity	Shot capacity Arrows - 50+ in one charge	Charging	Foster Quick Disconnect

NOTE: Energy











most shooters and has bolt action cocking with safety mode. Recoil free. removable magazine and is made in anodized aluminum. All stocks are ambidextrous/equal on both sides to suit A lightweight rifle with few moving parts that settles for many years of trouble free shooting. It has spring tensioned

4,5 (.177)	Calibe 6,35 (.25) - 5,5 (.22)	sides)	Ambidextrous (equal on both	pad (height/length/sideways) Adjustable cheek piece	Fully adjustable	sides)	Ambidextrous	Adjustable recoil pad •	sides) Walnut	Ambidextrous (equal on both	Adjustable rubber recoil-pad	Stock Synthetic	4,5 (.177) Holds To pellets	5,50 (.20) holds 12 pellets	Magazine type Spring tensioned:	Cocking system Bolt action
		3	(equal on both		Fully adjustable rubber recoil-		Ambidextrous (equal on both	oil pad •		Ū	•	**			ed:	
Air cylinder	Air capacity				Energy					Velocity		III gge	· incording	Pressure gauge No		Barrel
Not removable	185 cc	• SQIMI OZ	Cal 4,5 (.177) • 27 Joule	•Unavailable data Cal 5,5 (.22) • 36 Joule	Cal 6,35 (.25)	•1000 ft/s	Cal 4,5 (.177) • 300 m/s	• 870 ft/s	• Unavailable data Cal 5.5 (.22) • 265 m/s	Cal 6,35 (.25		(400 - 700 g)	Adimetable match trianger	e No	(6,35 - 600 mm)	FX Smooth Twist
	2	Evtrac	Charging		Weight				Length	No.	Muzzle	Opinos	Ontin	Safety	Fill pressure	Shot capacity
(adds 100 mm on total length,	with barrel support	Shrouded barrel integraded	Included fill probe	Walnut ME 2,7 kg Field Target 3,2 kg	Synthetic 2.2 kg	100 mm in lenght	Caliber 6,35 (.25) adds	Field Target: 910 - 935 mm	Synthetic: 930 mm Walnut ME: 940 mm		1/2" UNF	II IIIII dovetali loi scope	11 mm doubtell for coope	Bolt action safety mode	Max 220 bar (3200 psi)	Approx. 30 + at full power

NOTE: Energy stated in the into is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information.



with safety mode. Recoil free. Available in lightweight synthetic or walnut that fits both left and right-hand shooters. Bolt action cocking A lightweight single shot rifle with few moving parts that settles for many years of trouble free shooting.

Magazine type Single shot, no magazine Trigger Adjustable match trigger (400 - 700 g) Optics 11 mm dovetail for scope Stock Synthetic Adjustable ubber recoil-pad Ambidextrous (equal on both sides) Velocity Cal 6.5 (.22) - 285 m/s (.22) - 285 m/s (.24.5 (.22) - 285 m/s (.22) - 285 m/	Cocking system Bolt action	Bolt action	Pressure gauge No	e No	Safety	Bolt action safety mode
Synthetic Synthetic Adjustable tubber recoil-pad Ambidextrous (equal on both sides) Walnut Adjustable recoil pad Ambidextrous (equal on both sides) Field Target Fully adjustable rubber recoil-pad (height/length/ sideways) Adjustable rubber recoil-pad (height/length/ sideways) Adjustable rubber (height/sideways) Ambidextrous (equal on bot sides) Field Target Fully adjustable rubber (height/sideways) Ambidextrous (equal on bot sides) Field Target Fully adjustable rubber (height/sideways) Ambidextrous (equal on bot sides) Adjustable recoil-pad Annount (ad 5.5 (.22) - 265 m/s Cal 4.5 (.177) - 300 m/s Cal 5.5 (.22) - 36 Joule - 27 ft/lbs - 27 ft	Magazine type	Single shot, no magazine	Trigger	Adjustable match trigger	Optics	11 mm dovetail for scope
Adjustable rubber recoil-pad Ambidextrous (equal on both sides) Welnut Adjustable recoil pad Ambidextrous (equal on both sides) Welnut Adjustable recoil pad Ambidextrous (equal on both sides) Field Target Filly adjustable rubber recoil-pad (height/length/sideways) Adjustable cheek piece (height/sideways Ambidextous (equal on bot sides) Field Target Filly adjustable rubber recoil-pad (height/length/sideways) Adjustable cheek piece (height/sideways Ambidextous (equal on bot sides) Fill Target FX Smooth Twist Length 500 mm Fill pressure FX Smooth Twist Length 500 mm Fill pressure Max 220 bar (3200 psi) Length Length Length Length Weight Cal 5, 5, (22) · 265 m/s Cal 4, 5, (177) · 300 m/s Cal 6, 35 (.25) Cal 4, 5, (177) · 300 m/s Cal 5, (22) · 36 Joule Charging Extras Extras FX Smooth Twist Length 500 mm Fill pressure Max 220 bar (3200 psi)	Stock	Synthetic		(400 - 700 g)	Muzzle	1/5" UNF
Ambidextrous (equal on both sides) Wainut Wainut Wainut Ambidextrous (equal on both sides) Field Target Fully adjustable rubber recoil-pad (height/length/ sideways) Adjustable rubber recoil-pad (height/length/ sideways) Adjustable rubber recoil-pad (height/length/ sideways) Adjustable recoil pad (a 4,5 (,177) · 300 m/s Field Target Fully adjustable bern (bern recoil-pad (height/length/ sideways) Adjustable rubber (bern recoil-pad (height/length/ sideways) Adjustable recoil pad (a 4,5 (,177) · 300 m/s Energy Cal 4,5 (,177) · 27 Joule (20 ft/lbs) Gal 5,5 (,22) · 38 Joule (21 + 5,6 (,77) · 27 Joule (24 + 5,6 (,77) · 27 Joule) Gas (,25) - 5,5 (,25) - 5,5 (,25) Air capacity Air capacity Air capacity Approx. 30 + at full power (6,35 - 600 mm) Fill pressure Max 220 bar (3200 psi)	SIOCA	Adjustable rubber recoil-pad	Velocity	Cal 6 35 (95)	MINTZIE	72 ONT
Weinut Weinut Adjustable recoil pad Anbidextrous (equal on both sides) Field Target Fully adjustable rubber recoil-pad (height/length/sideways) Adjustable cheek piece (height/sideways Ambidextrous (equal on bot sides) 6.35 (.25) 5.5 (.22) 4.5 (.177) Ajr (rapacity (height/sideways) Air capacity (height/sideways		Ambidextrous (equal on both	June	Unavailable data	Length	Synthetic 930 mm
Walnut Adjustable recoil pad Ambidextrous (equal on both sides) .870 ft/s Cal 4,5 (177) • 300 m/s Weight Field Target Fully adjustable rubber recoil-pad (height/length/ sideways) Energy Cal 6,35 (.25) Weight Adjustable cheek piece (height/sideways Ambidextrous (equal on bot sides) Energy Cal 5,5 (.22) • 36 Joule • 27 ft/lbs Weight 6,35 (.25) 4,5 (.177) Air capacity 185 cc Charging 6,35 (.25) 4,5 (.177) Air cylinder Not removable Extras FX Smooth Twist Length 500 mm (6,35 - 600 mm) Shot capacity Appriox. 30 + at full power Fill pressure Max 220 bar (3200 psi)		sides)		Cal 5,5 (.22) • 265 m/s		Walnut 940 mm
Adjustable recoil pad Ambidextrous (equal on both sides) Field Target Fully adjustable rubber recoil-pad (height/length/sideways Ambidextrous (equal on both sides) 6,35 (.25) 6,35 (.25) 6,35 (.25) 7,5 (.27) 4,5 (.177) 8,35 - 600 mm) Fill pressure Ambidextrous (equal on both sides) 6,35 - 600 mm) Fill pressure Cal 4,5 (.177) - 300 m/s Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.27) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.25) Cal 6,35 (.27) Cal 6,35 (.2		Walnut		• 870 ft/s		Field Target 910 - 935 mm
Ambidextrous lequal on both sides) Field Target Fully adjustable rubber recoll-pad freight/length/ sideways (height/sideways Ambidextrous (equal on bot sides) 6,35 (.22) 6,35 (.25) 5,5 (.22) 4,5 (.177) FX Snooth Twist Length 500 mm (6,35 -060 mm) Fill pressure Ambidextrous (al. 6,35 (.25) (.25) (.26) (.26) (.26) (.27 ft/bs) (.27 ft/		Adjustable recoil pad		Cal 4,5 (.177) • 300 m/s		Caliber 6,35 (.25) adds
Field Target Fiel		Ambidextrous (equal on both		• 1000 ft/s		100 mm in lenght
Fully adjustable rubber recoil-pad (height/length/ sideways) Adjustable cheek piece (height/sideways Ambidextrous (equal on bot sides) As (.25) - 5,5 (.22) - 4,5 (.177) Air capacity Approx. 30 + at full power FX Smooth Twist Length 500 mm Fill pressure Max 220 bar (3200 psi)		Field Target	Energy	Cal 6,35 (.25)	Weight	Synthetic 2,2 kg
Cal 5,5 (.22) - 36 Joule Cal 5,5 (.22) - 36 Joule Cal 5,5 (.22) - 36 Joule Cal 4,5 (.177) - 27 Joule Cal		Fully adjustable rubber		Unavailable data		Walnut 2,7 kg
Adjustable cheek piece (height/sideways Ambidextrous (height/sideways (height		recoil-pad (height/length/		Cal 5,5 (.22) • 36 Joule		Field Target 3,2 kg
Adjustable cheek piece Cal 4,5 (.177)*27 Joule Charging		sideways)		• 2/ tt/lbs		
(equal on bot sides) 6.35 (.25) -		Adjustable cheek piece		Cal 4,5 (.177) • 27 Joule	Charging	Included fill probe
6.35 (.25) - Air capacity 185 cc 5.5 (.22) - Air cylinder Not removable 4.5 (.177) - Shot capacity Approx. 30 + at full power FX Smooth Twist Length 500 mm Fill pressure Max 220 bar (3200 psi)		(equal on bot sides)		- 20 10108	Extras	Shrouded barrel intergrade
5.35 (.25)			Air capacity	185 cc		with barrel support
4,5 (.177) Shot capacity Approx. 30 + at full power FX Smooth Twist Length 500 mm Fill pressure Max 220 bar (3200 ps))	Caliber	5,5 (.25) -	Air cylinder	Not removable		(adds 100 mm on total length)
FX Smooth Twist Length 500 mm (6,35 - 600 mm)		4,5 (.177)				
(6,35 - 600 mm) Fill pressure		EV Smooth Triest I county E00	Snot capacity	Approx. 30 + at full power		
	Dairei	(6,35 - 600 mm)	Fill pressure	Max 220 bar (3200 psi)		

NOTE: Energy stated in the info is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Joule and up. Contact your local dealer for more information.



THE BIATHLON MKII

The FX Biathlon MKII rifle is built in the spirit of the Olympic competition rimfire guns. This MKII version has been updated and rebuilt around the world class FX Smooth Twist X barrel system. The Smooth Twist X rifled barrel chambered in 177 caliber, provides consistent high-level accuracy that will stand up against any match barrel available. The rifle comes with a straight pull biathlon bolt that is indexing, using the distinctive thumb and forefinger method. This cycles a rotary magazine or

shooters can use an optional 5 shot straight magazine, made to match the rounds available in biathlon competitions. Other features include the fully adjustable synthetic stock, fully adjustable match grade trigger, AMP regulator (adjustable match precision regulator), harmess and sling rails, and a front globe and diopter sight option. The FX Biathlon MKII is a unique rifle perfectly suited for training and competition use in biathlon, 10 meter, and other similar disciplines.

om. Holes for sling in the of the stock	estock Sling rail in the	stable Cheek piece ht/offset. Adjustable oil pad height/length	hetic	ot straight magazine	ovable. hot Cal .177 delivered	nb return.	elever, straight pull with
Velocity	Trigger	Pressure gauge	Optics	Fill pressure	9	Barrel	Calibre*3
4,5 (.177): 295	Adjustable mat	One for airtube One for regulat	11 mm dovetai	230 Bar • 3300	Match grade Length 4,5 (.17	EX Smooth twi	4,5 (.177)

Stock

Synt Adju heig Reco Harr Hole of th Cocking system Side thur Magazine type Rem

	Energy	4,5 (.177): 24 J • 18 ft/lbs
vist X	Air capacity	190 сс
177): 500 mm	Length	950-980 mm
00 Psi	Weight	2,9 kg
ail front and rear	Charging	Quick charge system MkI
pressure	More features	More features AMP Externally adjustable pressure regulator
aroi picasaro		

NOTE: Energy stated in the info is maximum possible energy. Due to differences in regulations the rifle might be set to a lower energy, from 7,5 Jou'le and up. Contact your local dealer for more information.

match trigger 295 m/s • 940 ft/s

60

THE RANCHERO ARROW

The FX Ranchero Arrow is the premier, repeating pre-charged arrow pistol on the market. It sports a synthetic stock with soft touch panels that provide the ultimate in comfort for all weather

The action has been moved rearward in the stock for better balance and control, and a new side lever handle gives better

grip for ease of use. The patented 3-step Power adjuster has clear markings for low, medium and high settings and a scope rail is standard. The adjustable trigger unit help to give this pis tol the accuracy and power fx is famous for. Plastic carrying case is included. The Ranchero is the leader in high power recoil free arrow pistol performance.

Manual	Max 220 bar (3200 psi)	Arrow barrel	TACK GARGIGING	Not available	Kignit-flanded grip	Synthetic	pe Not available	em Sidelever	
Energy		Velocity		irigger		Pressure ga	Muzzle	Optics	
Approximately 40J • 30 ft/lbs	Approximately 68 m/s • 223fps	Adjustable in three steps	(100 ,00 9)	(400 - 700 G)	A	Pressure gauge Air tank gauge	Not available	11 mm dovetail scope mount	
			Charging	weight	Weight	Length	Air cylinder	Air capacity	
			Quick chard	1,4 Kg		440 mm	Removable	65 cc	

ge system MkI

Barrel


Fill pressure

Caliber

Stock

Cocking syst

Magazine typ

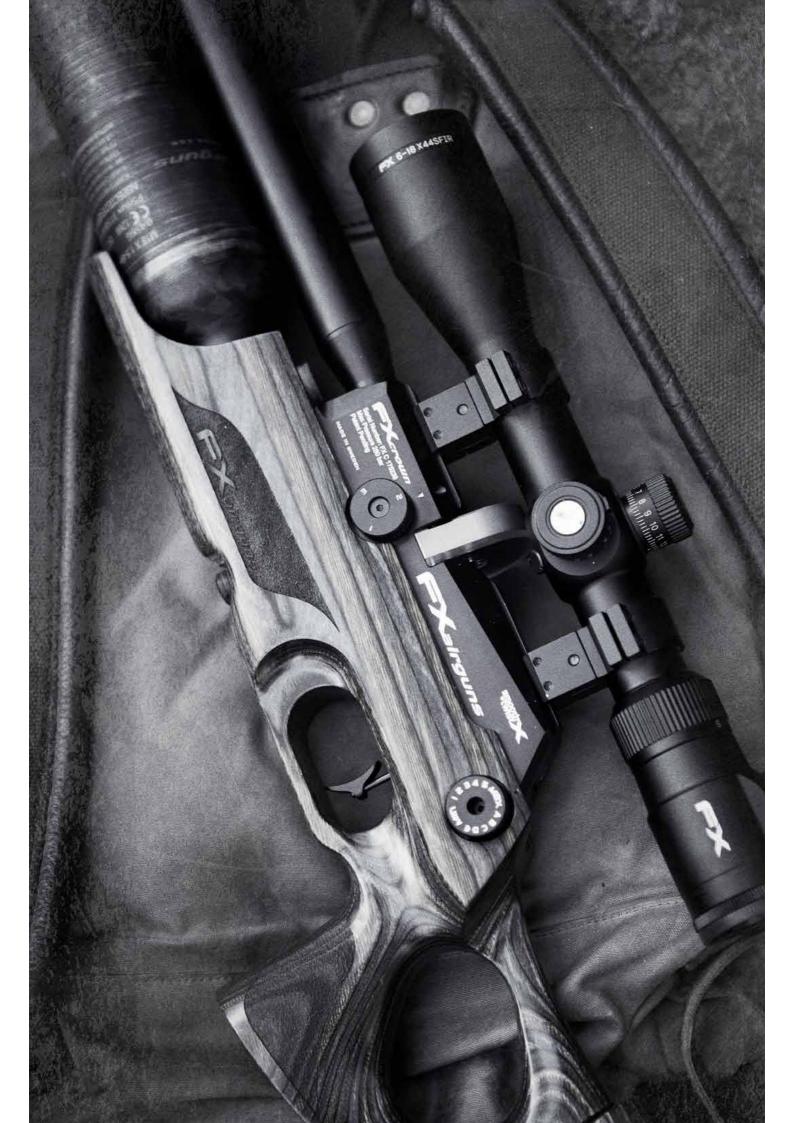

OPTICS



FX Optics 6-18x44 SFIR

Objective Lens Diameter 4.4 mm
Diopter Adjustment Range -2.0 / -2.0
Reticle Illuminated Red Parallax 10 yds-infinity - wheel adjusted Body Tube Diamter 30 mm
Total Length 335 mm
Total Weight 750 g
Lens Coating Fully Multi Coated



FX optics 3-12x44 ir/ao

Objective Lens Diameter 44 mm
Diopter Adjustment Range -2,0 / +2,0
Reticle Illuminated Red Parallax 30 yds-infinity
Body Tube Diamater 25,4 mm
Total Length 350 mm
Total Weight 500 g
Lens Coating Fully Multi Coated

Sight set

Complete Sight set for FX Biathlon and others with dovetail mount.

High sight base set: for height increase due to the size of the magazine, though different than in the picture.

Rearsight: Strong double base clamps and stainless steel screws suitable for all types of rifle short mounting rail allows maximum movement of the sight for all iris attachments long standard-threaded tunnel enables use of all irises and anti-glare tubes bullet shift 1,5 mm per click at 50 meters.

Iris: Adjustable over a wider range of 0,5 - 3,0 mm.

Anti-glare tub: 50 mm.

Foresight: M18 thread.
Element Grip Collar: M18.
Element: 3,6 Pole.



FX no limit scopemounts - 9-11mm or Picatinny

Vertically adjustable 3,8 mm 4 m at 100 m shooting distance. Eliminates all problem with limits of crosshair movement for long range shooting. Always lets you use the sweet spot of your scope and fine tune with crosshairs. Easy to use and affordable! Available for 1" and 30 mm scope tubes.

Weight: 130 g.

Connection foresight: 11 mm dovetail. Connection to Rifle: 1/2" thread.

Foresight mount
For mounting of diopter sight on
FX rifles and others.
Compensator function.
Adjustable clockwise.

Three stage pump

The easiest most convenient and affordable way to charge your airguns patented three way system gives you 200 bar with ease. Maximum fill pressure 250 bar.

Features: Pressure gauge, moisture trap, particle filter (replaceable), and bleed valve.

Connections: DIN or Kevlar hose 0,5 m with 1/8" thread.



Charging kit

Complete charging device for your scuba tank.

Features: Pressure gauge, particle filter (replaceable), and bleed valve.

Connections: Kevlar hose 0,5 m with 1/8" thread and FX Fillprobe. DIN in scuba end. Also available with Stainless quick connection.

ACCESSORIES



Four stage turbopump

The new turbopump is equipped with a patented 4 stage system. It has a unique gearing system that gives you the opportunity to gear down when it gets rough. It allows the user to choose if they want high volume (300 cc) with lowe pressure. Or low volume (200 cc) with higher pressure. Features: Pressure gauge, moisture trap, particle filter (replaceable), and bleed valve. Unique gearing system. Connections: DIN or Kevlar hose 0.5 m with 1/8" thread.

Quick Disconnect Fill Probe For easy swap between later model

For easy swap between later mode of quick charging connector and early model connector. Made of hardened steel.



Pump accessories

Various adapters DIN to 1/8". External moisture trap, easy to service and clean, 1/8" connections.



ACCESSORIES



Picatinny rail

use picatinny mounts. Swap the standard rail to this on your Wildcat to be able to



for Typhoon, T12 and Cyclone. Shrouded barrel with barrelsupport available



Cleaning pellets

5,5 (.22) and 6,35 (.25). Recommended for all FX guns. Outstanding cleaning without damage to the barrel. Available in 4,5 (.177),



Magazines

9 shot magazine for 7,62 (.30) 8 shot magazines available in 4,5 (.177) and 5,5 (.22) 11 shot magazine for 6,35 (.25)

New made in high grade aluminum

12 shot magazine for 5,5 (.22) 16 shot magazine for 4,5 (.177)



FX pellets

Calibre: 5,52 (.22) weight 1,030 g (16 grains). Calibre: 6,35 (.25) weight 1,645 g (25,4 grains). Calibre: 7,62 (.30) weight 3,25g (50,15grains). Calibre: 7,62 (.30) weight 3g (46,30grains). High performance domed (round tip) air rifle pellets.

Calibre: 4,52 (.177) weight 0,547 g.



Gauge assembly

You can use it with or without barrel support. This gauge suits all our front airtubes.



Barrel support

rel and shrouded versions (16 mm). used with barrel support. an older version of cylinder. Is to be Replacement end cap is required if with raised section on end cap. Requires newer version air cylinder Available for standard (14 mm) bar-



Tube extension

5-10 more shots at high power. 45 cc - 100 mm. additional volume. Approximately Add this to your existing airtube for



Pellettray

Available in .177 .22 .25 .30 Singelshot pellettray suits all FX rifles with springtensioned magazines.



Tube clamp

Allows easy addition of a sling, strap, bipod or other accessory of 33 mm. without any modification to the for all airtubess with a diameter fore end of the stock. Suitable



www.fxairguns.com

Airguns

Västerängsvägen 10, 542 35 Mariestad. Sweden. info@fxairguns.com